


**Product Specification**

LED Type	Tuneable White / RGB / RGBW
IC Type	UCS 7604
Frame Material	Aluminium 6063 T-6
Back Panel Material	KAPA Tech
Tension Fabric Material	Polyester
Mounting Method	Surface Mount / Suspended

**Photometric Diagram**

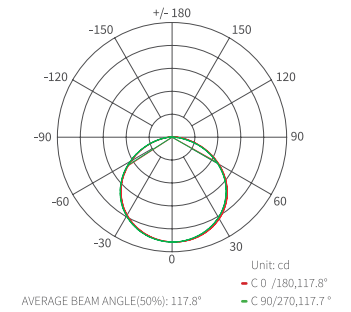

**Performance - (Based on 1000mm x 1000mm Lightbox)**

Input Voltage	220v - 240v / 50hz - 60hz		
Output Voltage	24v		
Rated Power	229 W (All channels at full power)		
IP Rating	IP 20		
CRI (Ra)	CCT	RGB	
	90 Ra	N/A	
Operating Temperature	-20°C ~ +60°C		

To explore more of our lighting products, scan the QR code below:



+44 (0)161 655 2100  
 info@unibox.co.uk  
 lighting.unibox.co.uk

**Tuneable White LED (2200K - 6500K) - Data based on 1M<sup>2</sup>**

Lumen Split	Warm White	Neutral White	Cool White
Lumen Output	3450 lm	4140 lm	3900 lm
Lumen Output (All Channels)	11610 lm/W		

**London Office:**  
 FBC Clerkenwell,  
 Bowling Green Lane,  
 London,  
 EC1R 0NE

**RGB LED - Data based on 1M<sup>2</sup>**

Lumen Split	Red	Green	Blue
Lumen Output	1352 lm	4140 lm	945 lm
Lumen Output (All Channels)	6555 lm/W		

**HQ & Manufacturing:**  
 Greenside Way,  
 Middleton,  
 Manchester,  
 M24 1SW

**RGBW available upon request.**

